



## A) As supplied

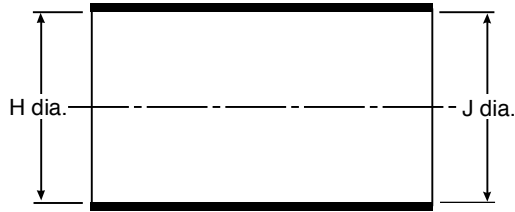

## B) After recovery

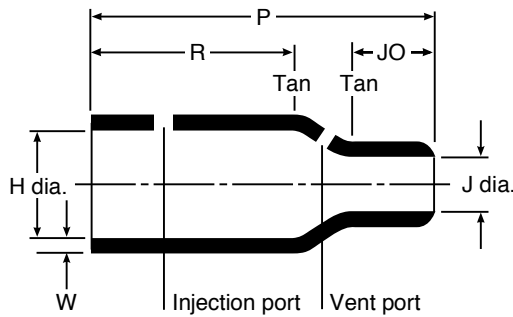

## 202A111-174

Straight non-lipped heat-shrinkable boot

### Applications

Mechanical protection and cable connector strain relief. As the part does not have a lip it can be installed directly onto the connector accessory thread.

### Materials available

- 3 Semi-rigid modified Polyolefin.
- 4 Flexible modified Polyolefin.
- 12 Modified Fluoro-elastomer.
- 25 Fluid resistant modified Elastomer.
- 100 Low fire hazard material.

### Coatings available

- 3 & -4 /42 General purpose hot melt adhesive.
- /86 High temperature hot melt adhesive.
- 25 /42 General purpose hot melt adhesive.
- /86 High temperature hot melt adhesive.
- /225 Pre-coated curing adhesive.
- 100 /86 High temperature hot melt adhesive.
- /180 Low fire hazard hot melt adhesive.

### Dimensions (all dimensions are in mm's)

	A) Dimensions as supplied (min)				B) Dimensions after heating recovery (max)						Weight
	H	H	J	J	H	J	P ±10%	R ±10%	JO ±10%	W ±20%	
<b>Material*</b>	-12 & -100		-12 & -100								
<b>Part Number</b>											
<b>202A111</b>	16.5	16.5	16.5	11.9	<b>7.9</b>	<b>3.8</b>	25.0	14.0	6.0	1.3	<b>1.0g</b>
<b>202A121</b>	24.6	22.6	24.6	17.8	<b>9.9</b>	<b>5.3</b>	38.0	22.0	9.0	1.5	<b>3.0g</b>
<b>202A132</b>	28.4	26.2	28.4	20.3	<b>14.2</b>	<b>6.6</b>	51.0	28.0	13.0	1.8	<b>3.6g</b>
<b>202A142</b>	31.0	31.0	31.0	25.4	<b>17.8</b>	<b>7.4</b>	67.0	36.0	18.0	1.8	<b>6.4g</b>
<b>202A152</b>	36.1	36.1	36.1	26.2	<b>21.9</b>	<b>8.6</b>	74.0	41.0	16.0	1.8	<b>11.3g</b>
<b>202A163</b>	42.7	42.7	42.7	27.2	<b>27.4</b>	<b>9.4</b>	99.0	63.0	18.0	2.0	<b>18.0g</b>
<b>202A174</b>	51.8	48.3	51.8	48.3	<b>35.3</b>	<b>16.0</b>	130.0	65.0	42.0	3.3	<b>45.0g</b>

**Note:** \*Dimensions apply to all available materials, unless otherwise stated.

### Ordering Information

- Standard colour: 0 = (Black).
- Size selection: To determine the size of the required moulded part, please refer to table.
- Modifications: -00 = Potting ports (Injection & Vent ports as indicated above).
- Standard packaging: Moulded parts are individually packaged.
- Ordering description: Specify the product name, size, material, coating and modifications required.
- Ordering Example:** To fit a 15mm connector, using -3 material in black = **202A132-3-0**.  
or using -100 material with hot melt adhesive = **202A132-100/86-0**.

**Note:** For a detailed description on how to construct your moulded part, please refer to the **Moulded Part Numbering Guide**. Larger sizes are also available on request, for more information please contact **IS-Rayfast**.