

MOULDED PARTS & SHAPES

202D921-963

Straight, high ratio, lipped heat-shrinkable boot

Applications

Mechanical protection and cable connector strain relief. Ideal for applications where only a small number of contacts are utilised, resulting in the need for a high ratio boot to match the connector to the cable diameter.

Materials available

- 3 Semi-rigid modified Polyolefin.
- 4 Flexible modified Polyolefin.
- 12 Modified Fluoro-elastomer.
- 25 Fluid resistant modified Elastomer.
- 100 Low fire hazard material.

Coatings available

- 3 & -4 /42 General purpose hot melt adhesive.
- /86 High performance hot melt adhesive.
- 25 /42 General purpose hot melt adhesive.
- /86 High performance hot melt adhesive.
- /225 Pre-coated curing adhesive.
- 100 /86 High performance hot melt adhesive.
- /180 Low fire hazard hot melt adhesive.

Dimensions (all dimensions are in mm's)

	A) Dimensions as supplied (min)			B) Dimensions after heating recovery (max)						Weight
	H	J	J	H	J	P	JO	HW	JW	
						±10%	±10%	±20%	±20%	
Material*	-12 & -100									
Part Number										
202D921	19.3	6.3	4.5	13.0	2.1	60.2	37.6	1.52	1.14	1.9g
202D932	26.1	7.6	5.5	19.1	2.6	74.2	45.0	1.78	1.14	3.7g
202D953	34.2	9.6	6.6	26.0	3.0	84.3	51.1	1.78	1.14	6.4g
202D963	43.6	11.4	7.8	34.1	3.6	99.6	57.7	1.78	1.14	13.0g


Note: *Dimensions apply to all available materials, unless otherwise stated.

Ordering Information

- Standard colour: 0 = (Black).
- Size selection: To determine the size of the required moulded part, please refer to table.
- Modifications: -00 = Potting ports (Injection port as indicated above).
- Standard packaging: Moulded parts are individually packaged.
- Ordering description: Specify the product name, size, material, coating and modifications required.
- Ordering Example:** To fit a 28mm connector, using -12 material in black = **202D953-12-0**.
or using -100 material with pre-coated adhesive = **202D953-100/225-0**.

Note: For a detailed description on how to construct your moulded part, please refer to the **Moulded Part Numbering Guide**.

A) As supplied

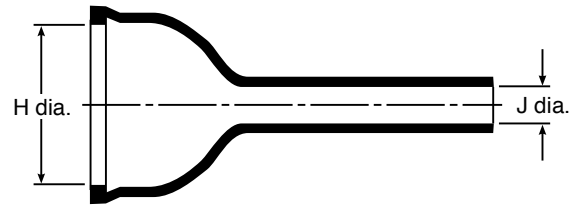

B) After recovery

