

PROTECTIVE SLEEVING

PTFE Spiral Binding

Abrasion Protection

Applications

PTFE Spiral binding can be used in industrial and office environments for the following applications:

- Organising wires for communication, computer equipment and control panels
- OEM applications for protecting tubes and harnesses
- Abrasion protection for control panel wiring
- Protect glass tubes from abrasion and breakage
- Eliminate lacing cord and tie-offs

Features & Benefits

- Re-usable
- Flexible and fast installation
- Allows breakouts of single/multiple and rerouting of replacement wires
- Harness multiple cables into a single manageable bundle


Operating Temperature

- -70°C to +260°C



Specification

- PAN 6480
- AS4 1088

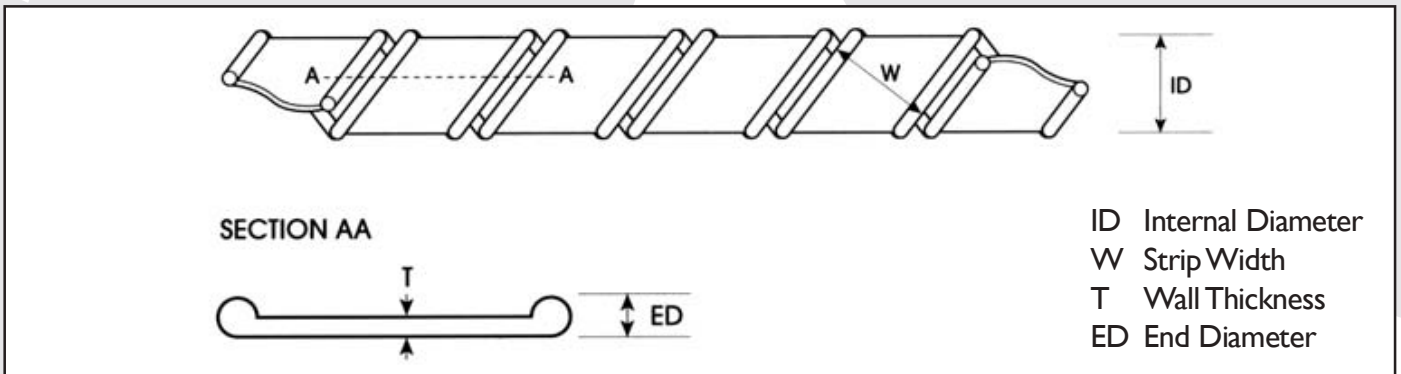

PTFE Spiral Binding Dimensions (all dimensions are in mm's)

Description	Internal Diameter (mm)	Strip Width (mm)	Wall Thickness (mm)	End Diameter (mm)	Weight (g/m)	Ordering Description
GTB 30	3.0 (±0.25)	5.0 (±0.25)	.75 (±0.08)	1.125	22.0	GTB-30-0
GTB 50	5.0 (±0.40)	5.0 (±0.25)	.75 (±0.08)	1.125	33.0	GTB-50-0
GTB 75	7.5 (±0.50)	8.0 (±0.40)	.75 (±0.08)	1.125	47.6	GTB-75-0
GTB 125	12.5 (±0.65)	10.0 (±0.50)	.75 (±0.08)	1.125	76.9	GTB-125-0
GTB 255	25.5 (±0.80)	12.5 (±0.65)	1.25 (±0.10)	1.660	250.0	GTB-255-0

Ordering Information

Standard colour: 0 = (Black).

Ordering description: Specify product name, size and colour; **GTB-30-0** (0=Black).

Ordering Example: A black protective sleeve capable of covering a 5mm cable diameter is required = **GTB-50-0** (0=Black).
A black protective sleeve capable of covering a 10mm cable diameter is required = **GTB-125-0** (0=Black).